


## DRAWING (mm)



## PHOTO

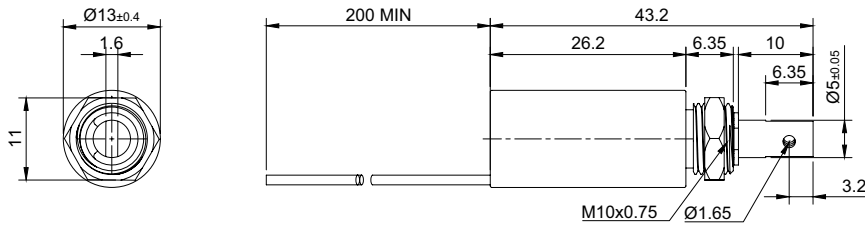

## MODEL NO. DESIGNATION

T1325L - VOLTAGE

Example: T1325L-06V

## ACCESSORIES

● C = customizations are offered on demand even for smaller quantities. Typical customizations are indicated with a green dot at column end. Please contact us for any customization request.

## SOLENOID DATA

		100	50	25	10
Duty cycle	%	100	50	25	10
Power	W	4	8	16	40
Max. time in energized state	s	∞	50	5	2

## PERFORMANCE DATA T1325L-06V

	100	50	25	10	
Duty cycle	%	100	50	25	10
Individual voltages	V	6	8.5	12	19
Resistance	Ω	9			

## PERFORMANCE DATA T1325L-12V

	100	50	25	10	
Duty cycle	%	100	50	25	10
Individual voltages	V	12	17	24	38
Resistance	Ω	36			


## PERFORMANCE DATA T1325L-24V

	100	50	25	10	
Duty cycle	%	100	50	25	10
Individual voltages	V	24	34	48	76
Resistance	Ω	140			

## SOLENOID FEATURES AND STANDARD DATA

Type	Pull type DC solenoid	
Nominal voltage range <sup>1</sup>	V	6 to 24
Loading force <sup>2</sup>	N	0.22
Cable	Flying wire	
Cable length	mm	230
Service life	At least 500000 single strokes	
Return spring	Yes	
Plunger material	Carbon steel 12L14	
IP rating	IP50	
Insulation class	B	
Weight	g	23
Operating temperature	°C	-5 to 40
Manufacturing standard	ISO9001   TS 16949	
CE label   UL label	No   No	

## PERFORMANCE GRAPH

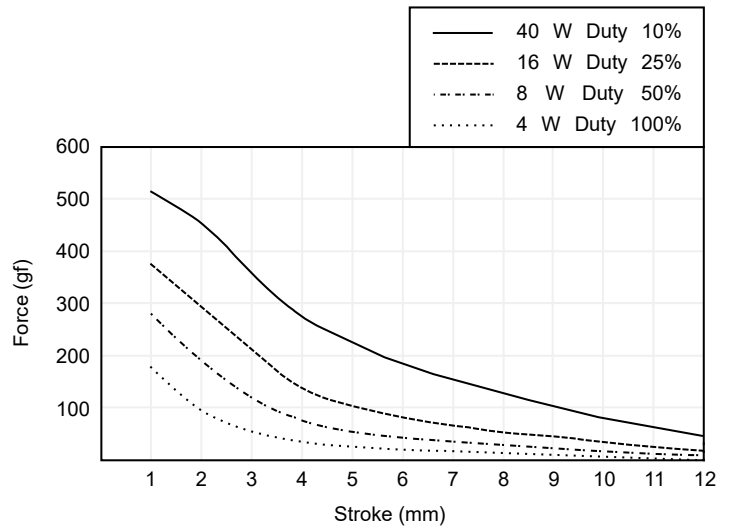

## NOTES

- Nominal voltages, 100 % duty cycle.
- At 3 mm compression.

## PLUNGER PROFILE

